

## WN-3010H/4510H/6010H

### Hand Type Impulse sealer 手壓式瞬熱封口機

\*Sealing width 封口寬度: 10mm

\*No warm up time 免預熱



#### SPECIFICATION (規格)

Model	型號	WN-3010H	WN-4510H	WN-6010H
Voltage	電壓	110 / 220 V	2400W	2900 W
Power (watt)	瓦特數	1540W 14A	2400W	2900 W
Max. sealing	封口尺寸	300 x 10mm	450 x 10mm	600 x 10mm
Heating Time	封口時間		0-1.5 sec.	
Max. Temp.	最大溫度		250°C	
Dimension	機器尺寸	58 x 13 x 27cm	73 x 13 x 27cm	88 x 13 x 27cm
Weight	重量	9.6KG	12KGS	14KGS

## WDH-200DR/350DR

### Hand type Direct Heat Sealer 手壓式直熱封口機

\*Max. Sealing: 封口尺寸 200 x 10mm

\*Flat Sealing Jaw + Teflon Coated 平面鍍鐵氟龍齒座

\*Upper heating 上蓋加熱

\*Warm up time: 5-7 min. 須預熱



#### SPECIFICATION (規格)

Model	型號	WDH-200DR	WDH-350DR
Voltage	電壓	110V/220V	110V/220V
Power (Watt.)	瓦特數	90W	150W
Max. sealing	封口尺寸	200 x 10mm	350 x 10mm
PRE-Heating Time	預熱時間	5-10 MIN.	5-10 MIN.
Max. Temp.	最大溫度	100-250°C	10-250°C
Dimension	機器尺寸	38 x 12 x 22cm	53 x 12 x 22cm
Weight	重量	5 KG	6.7 KG

## WSY-903A

### Band Sealer with Vacuum 連續式抽氣封口機

\*Vacuum + Sealing 抽氣+封口

Nozzle Type 吸嘴式

\*No Powder & Liquid 不可有粉末及液體

\*Optional: Date Coding, Counter 選配: 印字機、計數器

\*Distance 35mm from bag mouth to content 袋口預留 35mm



#### SPECIFICATION (規格)

Model	型號	WSY-903A
Voltage	電壓	110/220/240V 1 phase
Power (Watt.)	瓦特數	1160W
Sealing & Conveyor speed	速度	1-10M/Per min.
Sealing width	封口機寬度	10mm (Nylon)
Conveyor height adj.	輸送帶調整	90mm
Loading weight	輸送帶荷重	5kg/Per package
Dimension	機器尺寸	125 x 55 x 110cm

## WSV-700E IN-CHAMBER

### Vertical type Vacuum Packing M/C for powder & Liquid

站立式槽式真空包裝機  
粉末/液體 專用真空機

\*Vertical type 站立式作業, 適合粉末/液體真空作業


\*In-Chamber Vacuum 在槽內真空作業, 真空度高

\*Touching Control panel 觸控式面板

\*10 Programs 10組記憶功能

\*Counting 計數功能

\*Powder or Liquid do not exceed 70% of package 粉末/液體勿超過裝袋70%

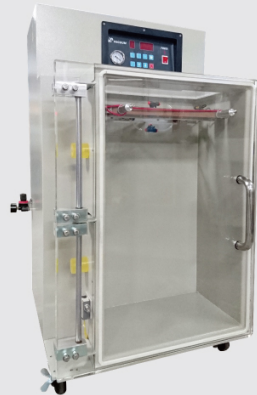

#### SPECIFICATION (規格)

Model	型號	WSV-700E
Voltage	電壓	220/240V
Chamber size	真空室尺寸	48(width) x 30 (depth) x 80 (height)cm
Vacuum Pump	真空幫浦	Oil - Filling 1HP
Sealing width	封口機寬度	10mm (Nylon)
Loading weight	荷重	25 KG
Dimension	機器尺寸	83 x 76 x 124CM



五行

## Compact rotary sealer for sterilization pouches and reels



醫療袋連續封口機



## WTC-200/300

A new compact model in the range of continuous sealing machines for sterilization pouches and reels. It allows a 12 mm seal with stand-by function, automatic in-feed through. Digital electronic temperature control placed on the upper side of the machine for a simple and clear reading.

- 鐵板機體加上粉體烤漆, 不易生鏽, 機器輕巧, 不佔空間。
- 採用數位控制面板, 加熱溫度穩定, 並附有計數器功能, 封口精美, 提高產品之美觀及價值。
- 連續式的封口, 有效節省操作時間。
- 最大封口尺寸: 無限制度\*12mm寬。

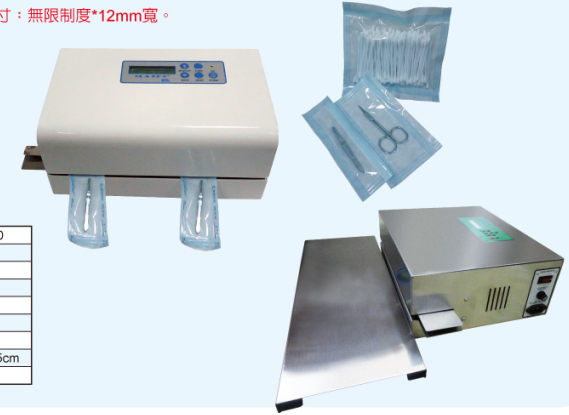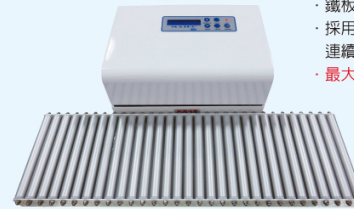

#### SPECIFICATION (規格)

Model NO.	型號	WTC-200	WTC-300
Voltage	電壓	110 / 220 / 240V 3.2A	
Power(Watt.)	電力(瓦特)		355 W
Max. Sealing (L)	最大封口	No limited 無限制長度	
Speed	速度	6.2 M/min.	
Warm up Time	預熱時間	0-5 min.	
Sealing width	封口寬度	12 mm	20 mm
Dimensions	機台尺寸	36 x 18 x 15cm	43 x 30 x 15cm
Weight	機器重量	8 kg	10 kg

## WD-3010HCA

### Impulse heat sealer for sterilization pouches and reels 醫療袋瞬熱帶刀封口機

Compact heat sealer special for medical, dental, and laboratories, for the sealing of sterilization pouches and reels. Sealing length: 300mm. Digital electronic temperature control. Comes with film-roll Stopper and sliding cutting device. Very easy operating, the sealing bars close by their pressing by hand only, without any lever, at the end of the pre-set time they will automatically stop. Sealing and cooling time are set by the operator.

The reminding device will remind the sealing and cooling are finished and can use the cutter to cut the sterilization pouches and reels. It can also extend the sealing elements life.

機器輕巧, 不佔空間。

瞬熱式: 10mm, 附置膜架適用整捲之醫療滅菌袋, 並附有一滑刀裝置,

有製作袋子之功能, 封口精美, 提高產品之美觀及價值。

最大封口寬度: 330長\*10mm寬

適用: 醫療滅菌袋、鋁箔袋、真空袋.....



#### SPECIFICATION (規格)

Model NO.	型號	WD-3010HCA
Voltage	電壓	110 / 220 / 240V
Power(Watt.)	電力(瓦特)	1300W 15A
Sealing width	封口寬度	330 x 10mm
Sealing time	封口時間	0-6 sec.
Cooling time	壓凝時間	0-9 sec.
Dimensions	機台尺寸	470 x 320 x 202mm
Weight	機器重量	10 kg

\*歡迎來樣試包 \*本公司另有製造各式封口機, 請來電或上網洽詢!!



五行

圓方圓興業股份有限公司

WU-HSING ELECTRONICS CO., LTD.

TEL: 886-4-22711498~2 FAX: 886-4-22712806

台中市 41154 太平區大里工業區工業15路10號

No. 10, 15th Road, Dali Industrial Park, Taiping Dist.,

Taichung, TAIWAN

Http://www.wuhsing.com

E-mail: wuhsing@ms17.hinet.net sealer@wuhsing.com.tw



## C-10 / C-15 功能：利用紫外線殺菌料理刀，衛生安全

### UV Lamp Sterilization Box for Chef Knives 紫外線殺菌箱-料理刀

Wu-Hsing make sterilization box for Chef Knives that made by stainless steel. To enhance the bacteria extermination result with powerful UV germicidal lamp. Can be hung on the wall that has appended the device. The knives rack is made in stainless steel too. This knives disinfection box is equipped with UV germicidal lamp that is highly effective at bacteria extermination, also knife handle. It comes with a safety device that turns off UV lamp whenever the door is opened for Knife retrieval. And UV glass for seeing through to check if the lamp is ON and no hurt your eyes.

Applications : restaurant, hotel, supermarket, house  
Optional: Chinese Chef Knives rack (另備中式大菜刀架)

#### SPECIFICATION (規格)

Model NO.	型號	C-10	C-15
Voltage	電壓	110 / 220 / 240 V	
Power(Watt.)	電力(瓦特)	1300W 15A	
Knives	可放刀數	Japanese knives 7pc Chinese knives 7pc	Japanese knives 14pc
Dimensions	機台尺寸	450 x 135 x 580mm	810 x 135 x 580mm
Weight	機器重量	10kg	13kg



## OD-01 / MPX-2000

### Insects Catcher 粘著式捕蟲器

環境衛生、安全、蟲蟲不亂入

#### Feature:



1. Made in Japan. Common using in Japan.
2. Attract the insects by 365nm light wave Catch the insects safely and easily.
3. Caught by special tape, not kill the insects. No hurt human body.
4. Applicant: for Restaurant, Hotel, Food Factory, Hospital, Home... for any place.
5. To make environment more pretty and warm.

#### SPECIFICATION (規格)

Model NO.	型號	OD-01
Voltage	電壓	110V/220V 60Hz
Lamp Power	燈泡功率	6 W
Effective Range	有效範圍	40-50M2 (平方)
Dimension	尺寸	331 x 128 x 114mm
Weight	重量	2.4 kg
Replaced Tape	替換膠帶	AS-6

#### SPECIFICATION (規格)

Model NO.	型號	MPX-2000
Voltage	電壓	110V 60Hz
Lamp Power	燈泡功率	20w
Effective Range	有效範圍	30-50M2 (平方)
Dimension	尺寸	69 x 7.5 x 23cm
Weight	重量	2.4 kg
Replaced Tape	替換膠帶	S-20
Housing material	機殼材料	stainless



## Newly designed Constant Heat Sealer 厚袋/大袋直熱封口機-橫紋/十字紋

\*needs an extra Air Compressor 5-7kg/cm2  
\*sealing length: 600mm

\*sealing width: 21mm  
\*2 patterns: mesh (++) line (==)



## WUC-600D Pneumatically operated Constant Heat Sealer- Horizontal type

Optional: Date Coder, Counter

#### SPECIFICATION (規格)

Model	型號	WUC-600D Horizontal sealing	LMSS-600D Vertical sealing
Voltage	電壓	AC 220V 1 Phase	AC 220V 1 Phase
Power (Watt.)	電力	Watt.: 2000W 9.1A	Watt.: 2000W 9.1A
Max. sealing	最大封口	600mm x 21mm	600mm x 21mm
Weight	重量	Approx. 100 KG	Approx. 130 KG
Dimension	尺寸	660 x 410 x 930 mm	700 x 890 x 1400~1970 mm(adjustable)
Material Used	材質	Alum. Foil, Thicker Bag 鋁箔, 鋁箔	
Optional	選價	1. Electrostatic painted body 烤漆 2. Stainless available (SUS) 不鏽鋼	
Compressor needed	空壓機	5-7 KGS/cm2客戶自備空壓機	

## LMSS-600D Pneumatically operated Constant Heat Sealer -Vertical type

Optional: Date Coder, Counter

\*Ideal for: Powder, Liquid

## AA-02/ AA-03 氣閥功能：1. 排出發內空氣 2. 聞香氣

### Coffee Valve Mounting Machine 咖啡袋氣閥機

\*Constant heat

\*Warm up time: 10 min.


\*keep its Temperature

\*optional: valve holes :1-6


\*extra Air Compress: 6-7kg/cm2

#### SPECIFICATION (規格)

Model	型號	AA-02	AA-03
Voltage	電壓	110 / 220 / 240V	
Power(Watt.)	電力(瓦特)	60 W	
Valve holes	氣閥孔	1-6	
Warm up time	預熱時間	10 min	
Temperature	最大溫度	0-300 degree C	
Dimensions	機台尺寸	27 x 25 x 45 cm	45 x 25 x 45 cm
Weight	機器重量	11.5 kg	12.5 kg



\*needs sample Air Valve for Valve seat making  
(需提供氣閥樣品以製作氣閥座)



## W-600ECA

### Semi-Auto Impulse Sealer with Cutter 電動瞬熱式帶刀封口機

\*Electromagnet control Impulse Sealer with Cutter \*Ideal for: PE, PP, OPP, PVC... \*Power saving  
\*The sliding knife may be used to trim a pre-made bag or to make bag from poly tubing.  
\*Impulse sealing \*sealing width: 2mm ~5mm  
\* Easy to operate:

1. Press down the Handle, the upper bar will be sucked by 2 electromagnets.
2. After sealing & congealing(cool) time up.
3. Slide the knife to cut the bag edge or tube film.
4. Press the release button to lift the sealing bar.

#### SPECIFICATION (規格)

Model	型號	W-600ECA
Voltage	電壓	110 / 220 / 240V
Power(Watt.)	電力(瓦特)	1800W 16A
Sealing width	封口寬度	600 x 2 / 2.7 / 5mm
Sealing time	封口時間	0-1.5 sec
Max. Temp.	最大溫度	250 degree C
Dimensions	機台尺寸	680 x 280 x 230mm
Weight	機器重量	23 kg



Release button

## WNS-1510HT

### Electromagnet control Impulse Sealer

#### 最小型電動瞬熱式封口機

-Power & space saving -easy to stock  
\*Impulse Sealing \*Double-side sealing: 10mm  
\*Ideal for Alum. foil bag, Kraft paper bag (Coffee bags & tea leaves bags)

\*Easy to operate:

\*After set up the Sealing (heat) and Congealing (cool) time, press the upper sealing bar by one hand and is sucked by Electromagnets. After sealing is finished and lifted automatically.

#### SPECIFICATION (規格)

Model	型號	WNS-1510HT
Voltage	電壓	110 / 220 / 240V
Power(Watt.)	電力(瓦特)	1700 W
Sealing width	封口寬度	150 x 10mm
Sealing time	封口時間	0-1.5 sec
Max. Temp.	最大溫度	250 degree C
Dimensions	機台尺寸	26 x 20 x 19.2 cm
Weight	機器重量	13 kg



## WNS-200D

### Electromagnet control Constant Heat Sealer

#### 最小型電動直熱式封口機

-Power & space Saving  
\*Constant Heat Sealer \*War up time: 7-10 minutes  
\*sealing width: 15mm \*Ideal for Alum. foil bag, Kraft paper bag (Coffee bags & tea leaves bags)

\*Easy to operate:

When up to required temperature, press the Knob of sealing bar by one hand and is sucked by Electromagnets, After sealing is finished and lifted automatically.

#### SPECIFICATION (規格)

Model	型號	WNS-200D
Voltage	電壓	110 / 220 / 240V
Power(Watt.)	電力(瓦特)	250 W
Sealing width	封口寬度	200 x 10 mm
Warm up time	預熱時間	7-10 min.
Temperature	溫度	0-300 degree C
Dimensions	機台尺寸	210 x 265 x 225 mm
Weight	機器重量	8 kg



## WB-300D/450D

### Cellophane Sealer 玻璃紙封口機

\*Constant heat

\*Warm up time: 7-10 min.

\*keep its Temperature

\*Easy to operate:

When up to required temperature, After wrap the box by Cellophane film, take its folded place to be touched the heating jaw a while.

#### SPECIFICATION (規格)

Model	型號	WB-300D	WB-450D
Voltage	電壓	110 / 220 / 240V	
Power(Watt.)	電力(瓦特)	150 W	200 W
Sealing width	封口寬度	300 x 15 mm	450 x 15 mm
Warm up time	預熱時間	7-10 min.	
Temperature	最大溫度	0-300 degree C	
Dimensions	機台尺寸	10 KGS	11 KGS
Weight	機器重量	39.5 x 31 x 15 cm	48.5 x 31 x 15 cm

